




**FIG. 1**

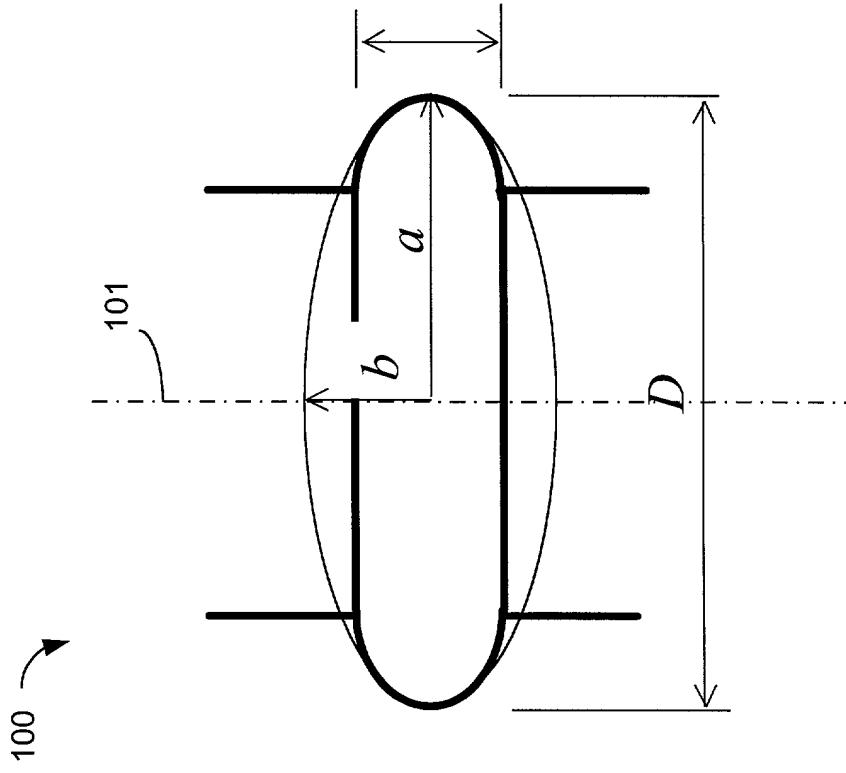


**FIG. 2A**




**FIG. 2B**




**FIG. 2C**

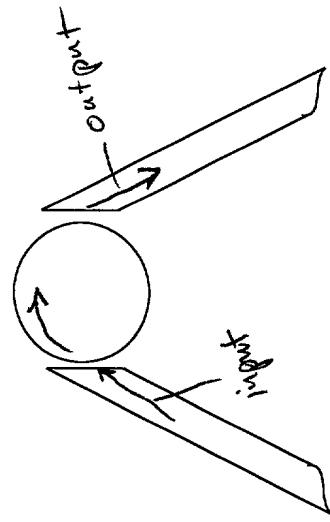


**FIG. 3**

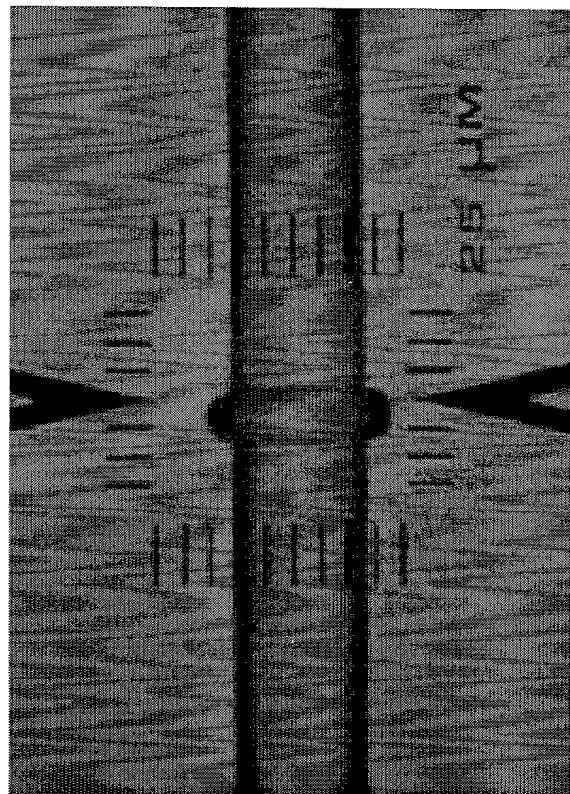


**FIG. 4**

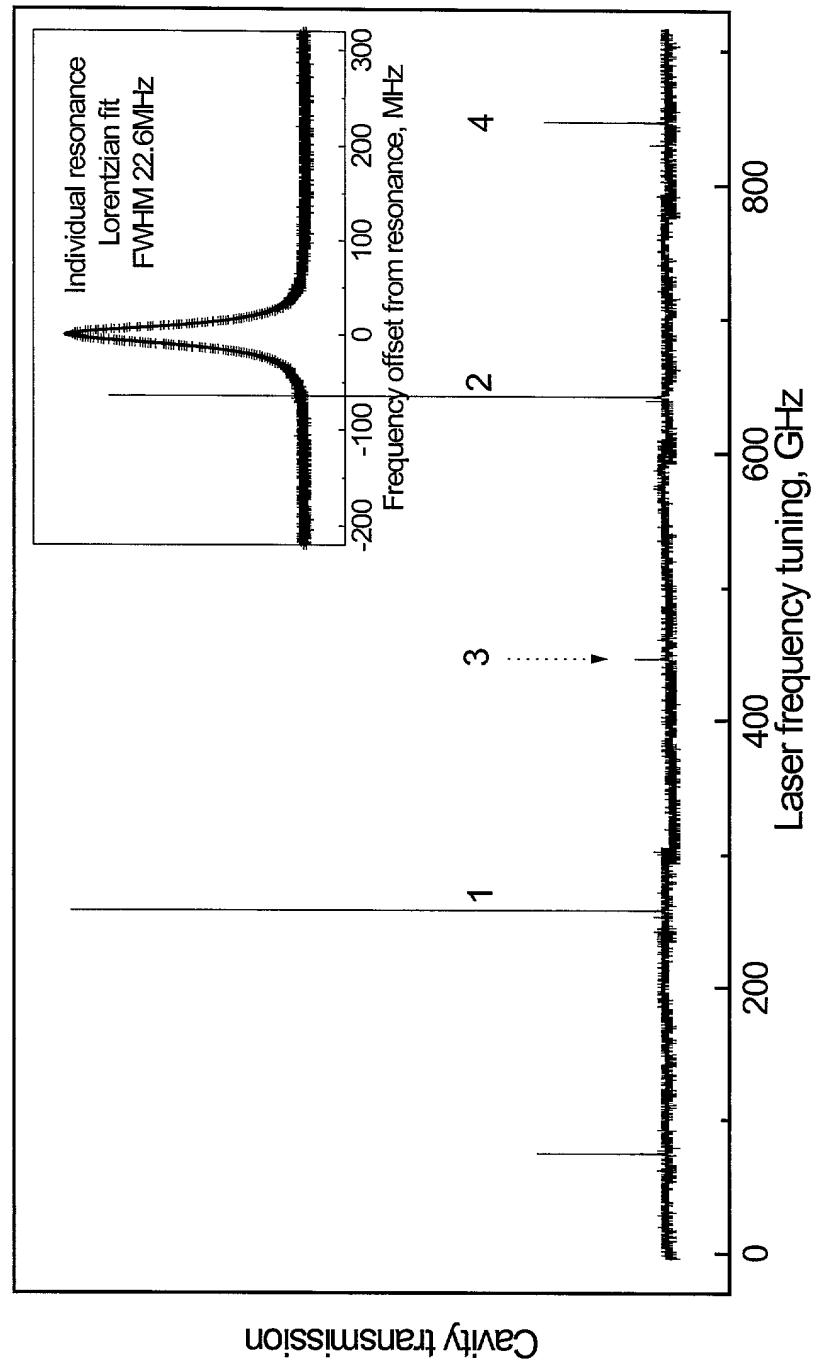


**FIG. 5A**

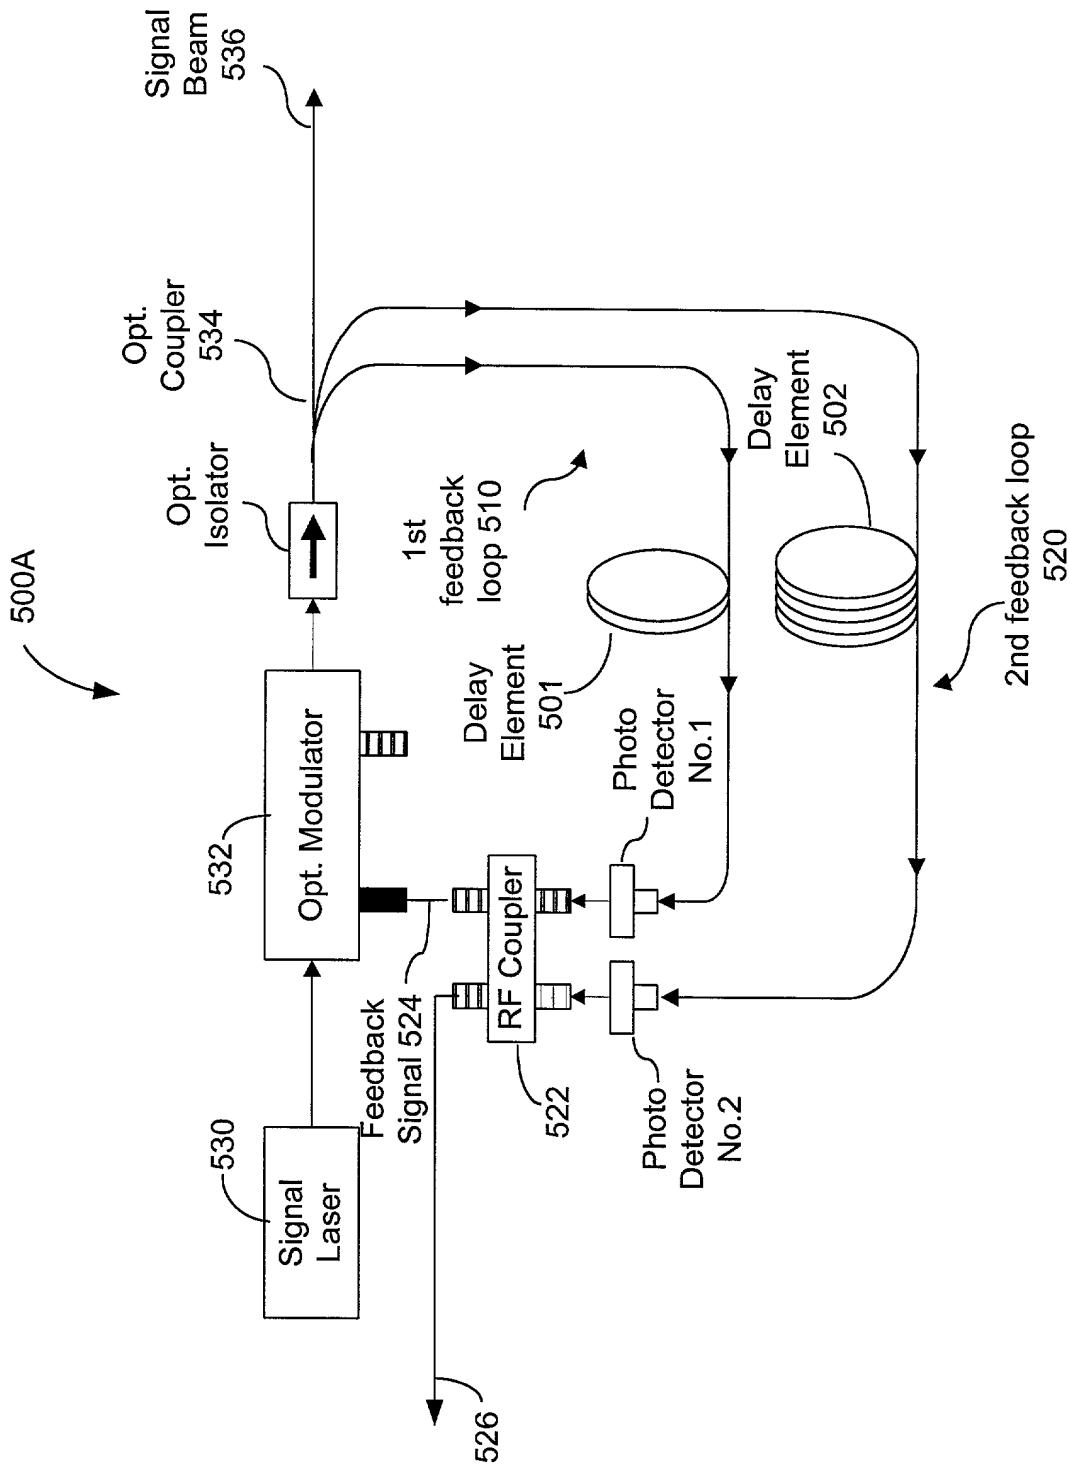


**FIG. 5B**

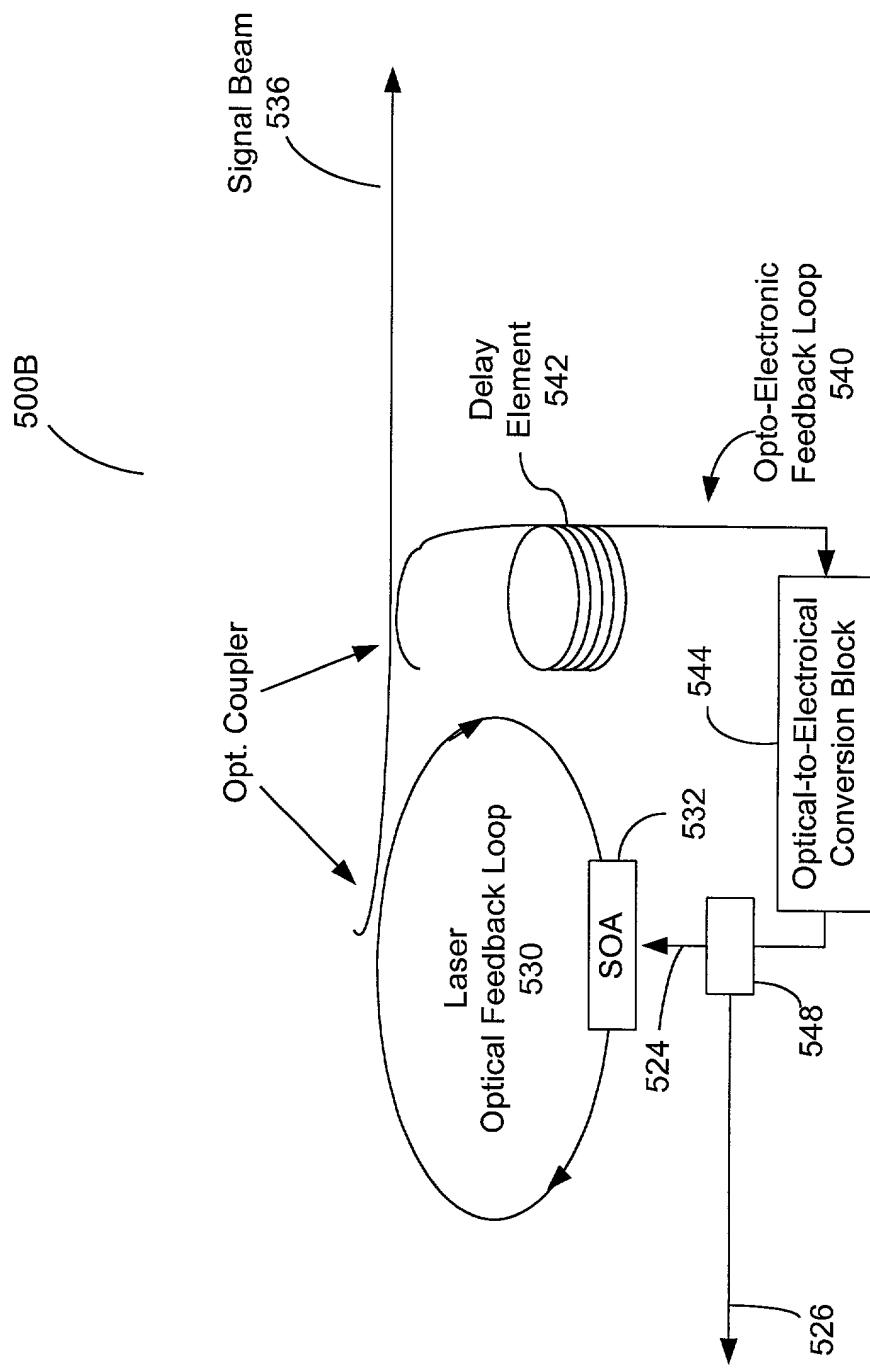

**FIG. 5C**

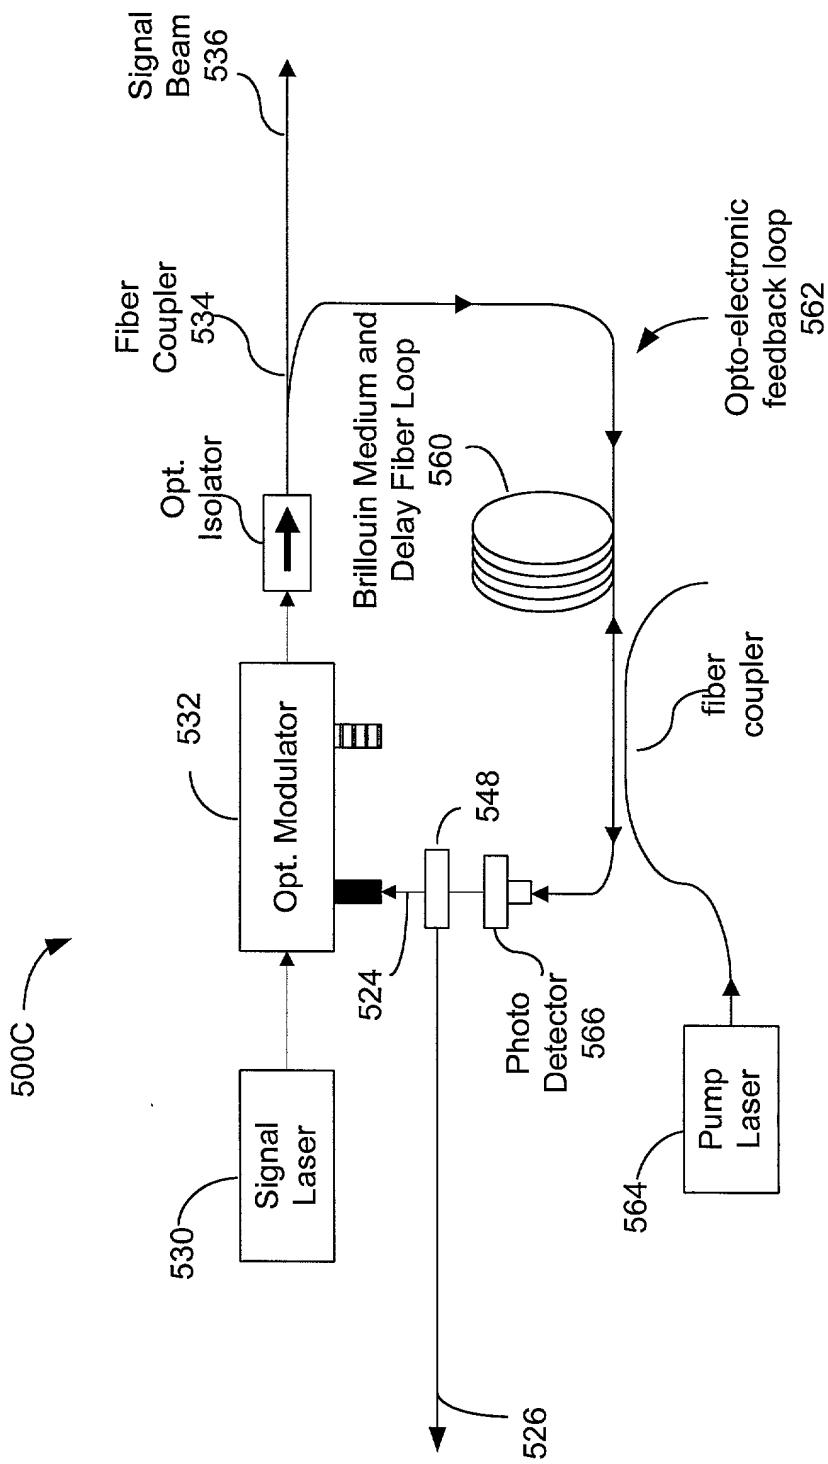

**FIG. 6A**

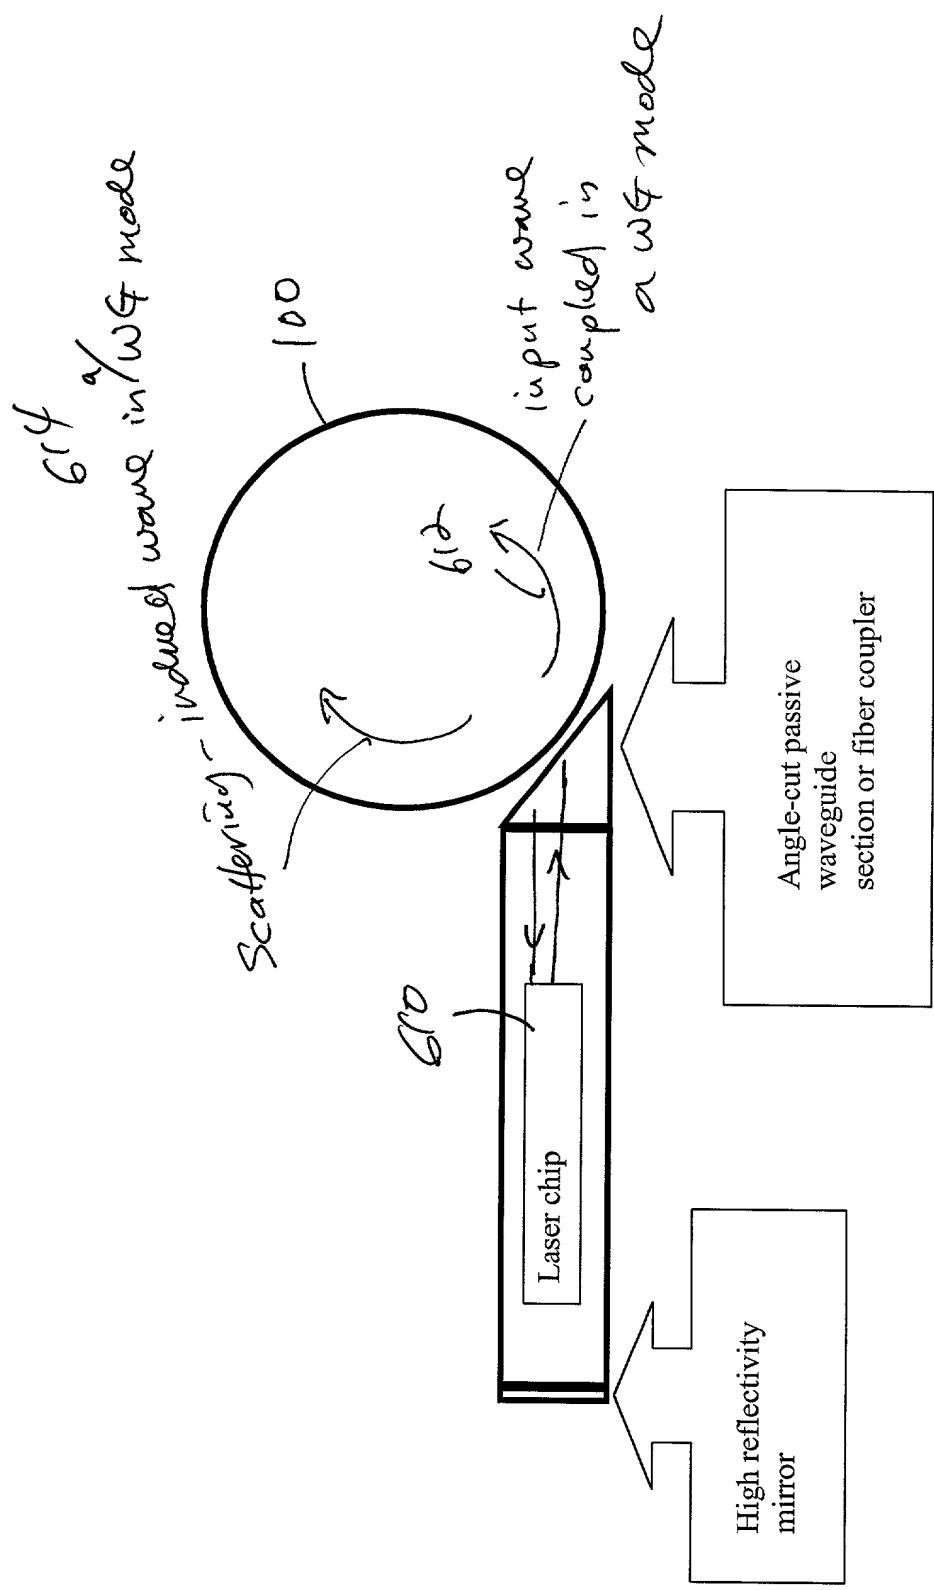

**FIG. 6B**

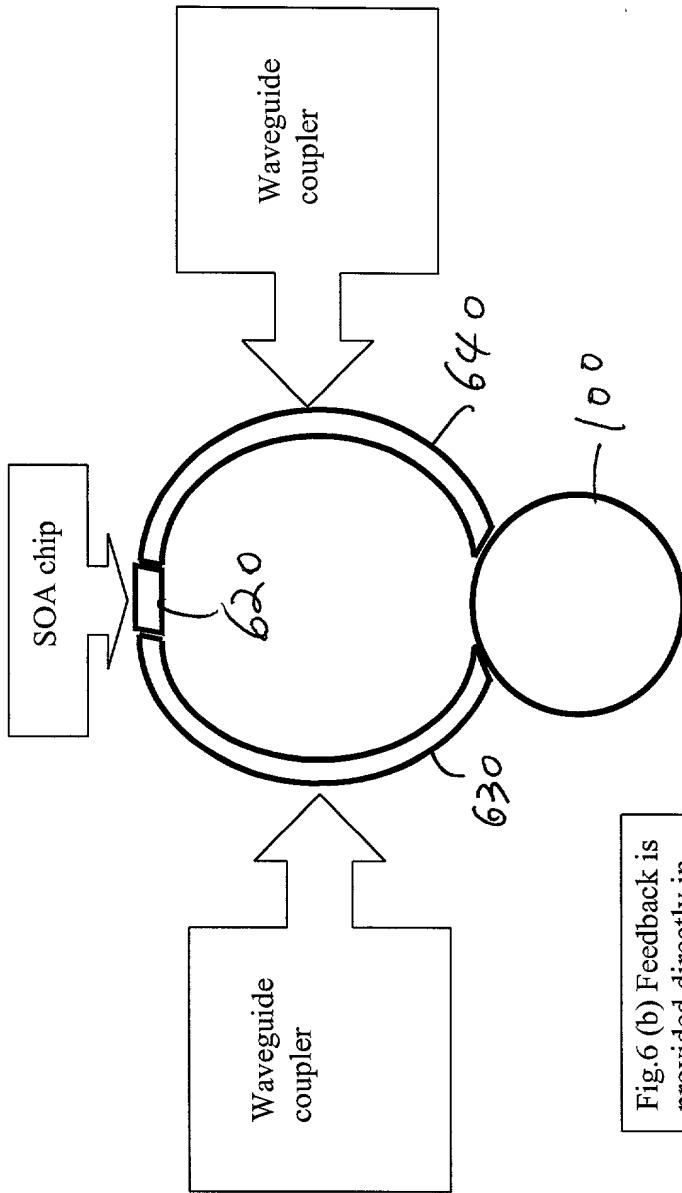


Fig.6 (b) Feedback is provided directly in the closed loop, by second evanescent optical coupler and waveguide